

HARD DRIVE INSTALLATION AND CONTENT ACTIVATION GUIDE

Server Model Numbers T-420, RM-640, RM-640x, WAN-880x, WAN-1240

TABLE OF CONTENTS

Hard Drive Installation and Content Activation Guide.....	1
Table of Contents	1
Before You Begin:.....	2
Backing Up Data and Media.....	3
Installing a Hard Drive	5
<i>Part 1: Seat the Hard Drive</i>	<i>5</i>
<i>Part 2: Hard Drive Configuration</i>	<i>9</i>
Activating a Content Package or Add-On Package	13
Adding a New Content Drive or CreationStation Drive to SAFARI Montage	15
<i>Part 1: Installing the Hard Drive</i>	<i>15</i>
<i>Part 2: Confirming the New Content Drive or CreationStation Drive Installation.....</i>	<i>16</i>
<i>Part 3: Upgrading the SAFARI Montage software</i>	<i>18</i>
<i>Part 4: Activating the New Content Package or CreationStation Add-On Package.....</i>	<i>19</i>
Restoring Backup to a Different SAFARI Montage Server (DRIVE SWAP)	22
<i>Part 1: Upgrading the SAFARI Montage software</i>	<i>22</i>
<i>Part 2: Backing Up Data and Media.....</i>	<i>22</i>
<i>Part 3: Installing the SAFARI Montage Server.....</i>	<i>22</i>
<i>Part 4: Activating Content Packages and Add-Ons.....</i>	<i>22</i>
<i>Part 5: Restoring Data and Media from Backup</i>	<i>22</i>
<i>Part 6: Mapping Playlist Items.....</i>	<i>23</i>
<i>Part 7: Test the System</i>	<i>24</i>
Upgrading or Replacing Operating System Hard Drive	24
<i>Part 1: Upgrading the SAFARI Montage software</i>	<i>24</i>
<i>Part 2: Backing Up Data and Media.....</i>	<i>24</i>
<i>Part 3: Installing operating system hard drive.....</i>	<i>24</i>

<i>Part 4: Activating Content Packages and Add-Ons</i>	24
<i>Part 5: Restoring Data and Media from Backup</i>	24
<i>Part 6: Mapping Playlist Items</i>	25
<i>Part 7: Test the System</i>	26
Troubleshooting	26


BEFORE YOU BEGIN:

- It's important that you follow the steps outlined in this manual for optimal performance of your SAFARI Montage system.
- We recommend that you perform a backup of your SAFARI Montage system prior to installing your new hard drive. See page 3 "Backing Up Data and Media" for more details.
- We recommend that you allow internet access in order to activate and assign the content.
- Prior to upgrading, we recommend that you refer to the system requirements found online at <http://www.safarimontage.com/support>.
- Check the packing slip and confirm that you have the correct hard drives and, if necessary, software update DVD.
- Please note that the images and screenshots in this guide may differ slightly depending on your version of SAFARI Montage.
- Additional support can be found online at <http://www.safarimontage.com/support>.

BACKING UP DATA AND MEDIA


We recommend that you back up your data and files regularly using the SAFARI Montage Data Recovery tool found in Admin → Data Recovery. Instructions for SAFARI Montage Data Recovery can be found in the Help section under “Backup and Data Recovery Guide” in the “Administrator Guide”.


Prior to backup, we recommend that you take note of your network, LDAP and time server settings, as well as any personalized login screen or CreationStation™ images and logos. This data may be necessary when configuring a new server or restoring your existing server.

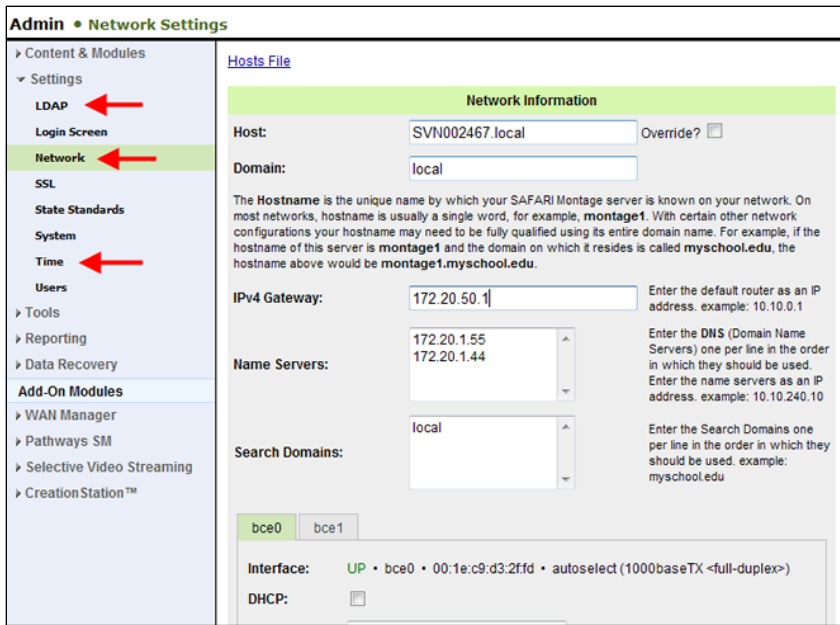

The network, LDAP and time server settings can be found in the Admin → Settings section. Please copy these settings into a text document if necessary and save.

The CreationStation logo graphic can be found in the Admin section under Configure → CreationStation. Please save this image from the web page so it can be uploaded again if necessary.

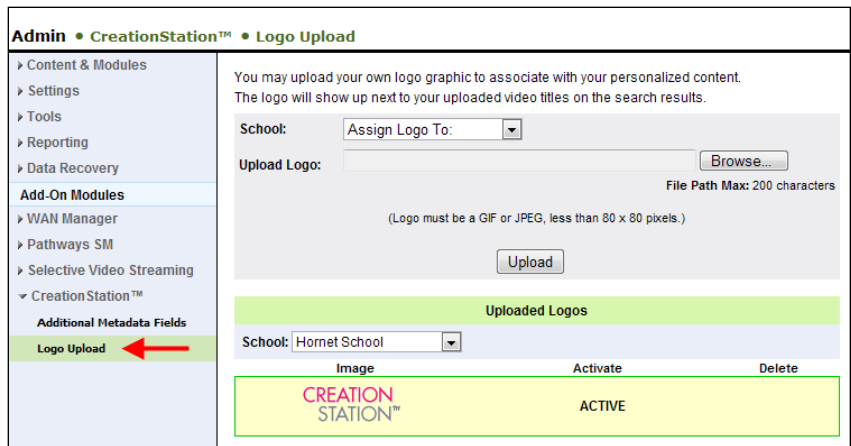

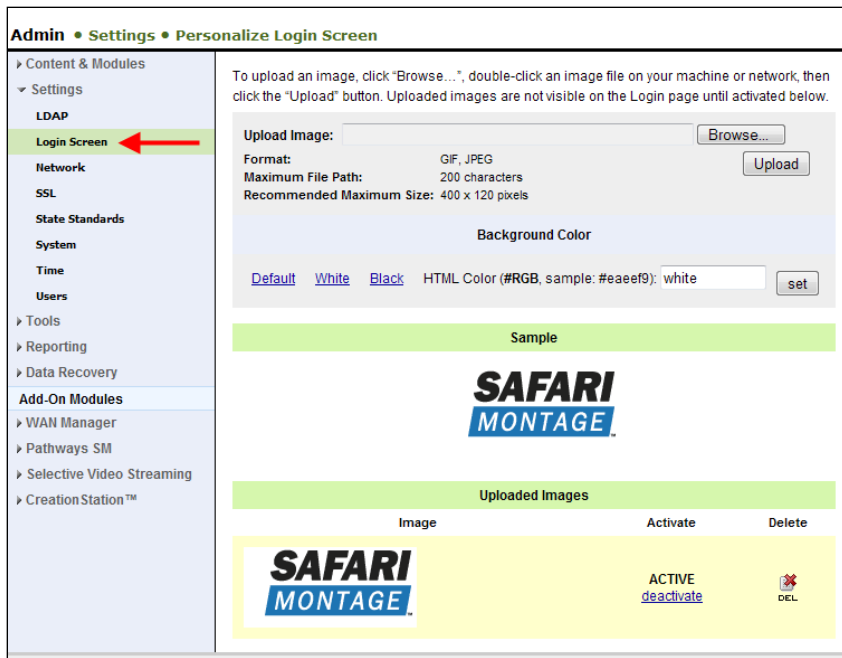


Login screen logo graphics can be found in the Admin section under Settings → Login Screen. Please save the images in the uploaded images list on the web page so they can be uploaded again if necessary.

The SAFARI Montage Data Recovery interface can be found in the Admin → Data Recovery section.

Instructions for SAFARI Montage Data Recovery can be found in the Help section under “Backup and Data Recovery Guide” in the “Administrator Guide”.

IMPORTANT!

If CreationStation is installed, you should set the “Data Only” drop-down to “No”.

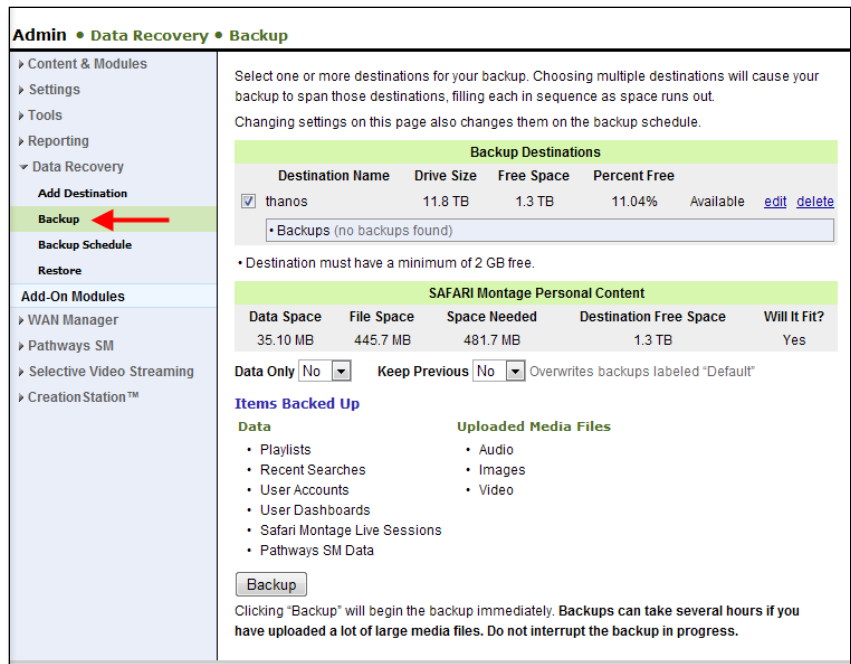

Operating System Drives Only:

IMPORTANT: If you are replacing operating system hard drives, this is the sequence you should follow:

1. Power down the server.
2. Remove the operating system hard drives from the server.
3. Remove the remaining content or CreationStation hard drives, but be prepared to reseat them.
4. Seat the new operating system drives as shown in Steps 1 through 3 below.
5. Power on the server.
6. Configure the operating system hard drives as shown on Page 5 “Hard Drive Configuration”. If you are adding more drives, you do not have to exit the Configuration Utility to reboot until all the drives have been added.
7. Reseat the remaining content or CreationStation hard drives, wait until they appear in the configuration utility and configure as shown on Page 5 “Hard Drive Configuration”.


For **T-420, RM-640** and **RM-640x**: The operating system is on one hard drive. This drive is placed in the bay labeled **0**.

For **WAN-880x**: The operating system is on two hard drives in a RAID array. The two hard drives that make up the RAID are located in the bays labeled **0** and **1**.

For **WAN-1240**: The operating system is on two hard drives in a RAID array. The two hard drives that make up the RAID are located in the bays labeled **8** and **9**.

If you received a single hard drive to replace a malfunctioning hard drive in the RAID array, you will need to know which drive needs to be removed.

The “Virtual Disk Management” screen will report a missing disk if you are running with only one functioning drive in the RAID array.

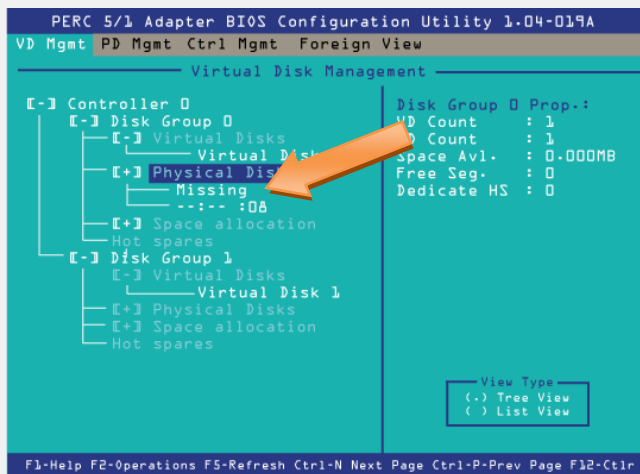

There will be a green light above the functioning drive. Please look for the lights above each bay as well as any status or error messages that may be visible on the display on the front panel.

If you received **two hard drives** for the operating system, they will be paired prior to shipment and will need to be installed and configured. Remove the original RAID pair in bays **0** and **1** (WAN-880x) or **8** and **9** (WAN-1240) and insert the new operating system hard drives and power up the system.

NOTE: If you are replacing a hard drive, remove the original hard drive and install the new drive in accordance with the instructions in this section.

- Store the original hard drive in a safe place until you are certain that the new hard drive is properly installed and the configuration is correct.
- Once you have confirmed the installation and configuration are accurate, you should return the original hard drive to SAFARI Montage if so directed or discard or reformat the original hard drive for use outside of the SAFARI Montage system.
- Both the original hard drive and the new drive remain the property of the purchaser of those drives. Note, however, that the applicable warranty that accompanies the drives (and any corresponding extended warranty or service agreement) is voided when the drives are altered or used in any way outside of the SAFARI Montage system, including without limitation any reformatting, duplication or installation in another server.

NOTE: If this is a WAN Manager with Expansion Server environment, you will need to install and configure the new hard drive in each server in your environment. We recommend that all servers in the environment be powered down during the upgrade.

Install the hard drive and update the software, if necessary, on the WAN Manager/Expansion Controller first. The Expansion Servers should have the hard drive installed while they are powered down, as well. Once the WAN Manager/Expansion Controller is available, you can power up the Expansion Servers. If the software was updated on the Expansion Controller, it will be pushed to the Expansion Servers as they become available on the network.

Step 1: Power down the SAFARI Montage server.

Step 2: Remove Bezel from the server.

T-420:

Front Bezel Release Switch



The operating system hard drive is in the top bay labeled 0.


RM-640 / RM-640x:

The operating system hard drive is in the top left bay labeled 0.



WAN-880x:

The two operating system hard drives are labeled 0 and 1 and are located here

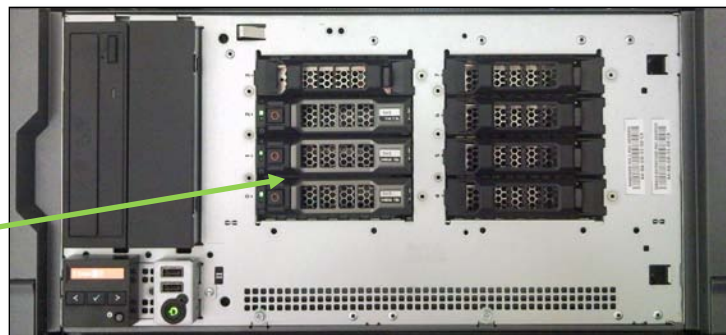

WAN-1240:

The two operating system hard drives are labeled 8 and 9 and are located here



Step 3: Insert the new hard drive into an available bay.


After you remove the bezel, you will see the drive bays. Depending on the model there are four to ten bays. Also, depending on the initial configuration you may have several of the bays already filled.

Remove the plastic hard drive panel from the empty bay that you wish to insert the new hard drive into.

Open the handle on the drive sled and slide the new hard drive into the empty bay. Close the handle on the drive sled. It will click into place.

Step 4: Replace the bezel.

Drive bays

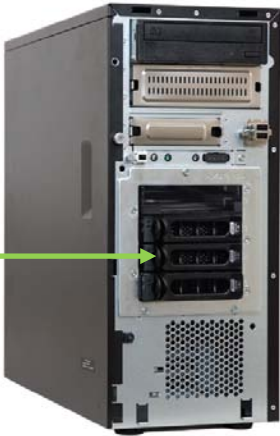

Step 1: Power up the server and access the configuration utility.

Power up the server.

Once the “Poweredge Expandable RAID Controller BIOS” message appears, Press “Ctrl+R” wait for the prompt, then press “C” to get to the “Virtual Disk Management” configuration utility.

[NOTE: If you miss this prompt, you will need to press Ctrl+Alt+Del and reboot the server to get back to this option.]

```

One 1.80 GHz Dual-core Processor, Processor Bus: 800 MHz, L2 cache: 1MB
Remote Access Controller detected

Sil 0680 ATA/133 Controller BIOS Version 3.4.1027
Copyright (C) 1997-2004 Silicon Image, Inc.
Drive Number:0      VIRTUALFLOPPY DRIVE Removable Media Drive
Drive Number:1      VIRTUALCDROM DRIVE

Broadcom NetXtreme Ethernet Boot Agent v4.3.9
Copyright (C) 2000-2005 Broadcom Corporation
All rights reserved.
Press Ctrl-S to Enter Configuration Menu ...

PowerEdge Expandable RAID Controller BIOS
Copyright (C) 2006 LSI Logic Corporation
Press <Ctrl><R> to Run Configuration Utility

F/W Initializing

```

NOTE: If this is an operating system hard drive replacement, you may receive these messages:

```

Foreign configuration(s) found on adapter.
Press any key to continue, or 'C' to load the configuration utility.

```

```

Some configured disks have been removed from your system, or are no longer
accessible. Check your cables and also ensure all disks are present.
Press any key to continue, or 'C' to load the configuration utility.

```


```

The following VD's are missing: 00
If you proceed (or load the configuration utility), these VD's will be removed
from your configuration. If you wish to use them at a later time, they will
have to be imported. If you believe these VD's should be present, please power
off your system and check your cables to ensure all disks are present.
Press any key to continue, or 'C' to load the configuration utility.

```


Press 'C' to continue.

Step 2: Using the arrow keys, select “Controller 0”.

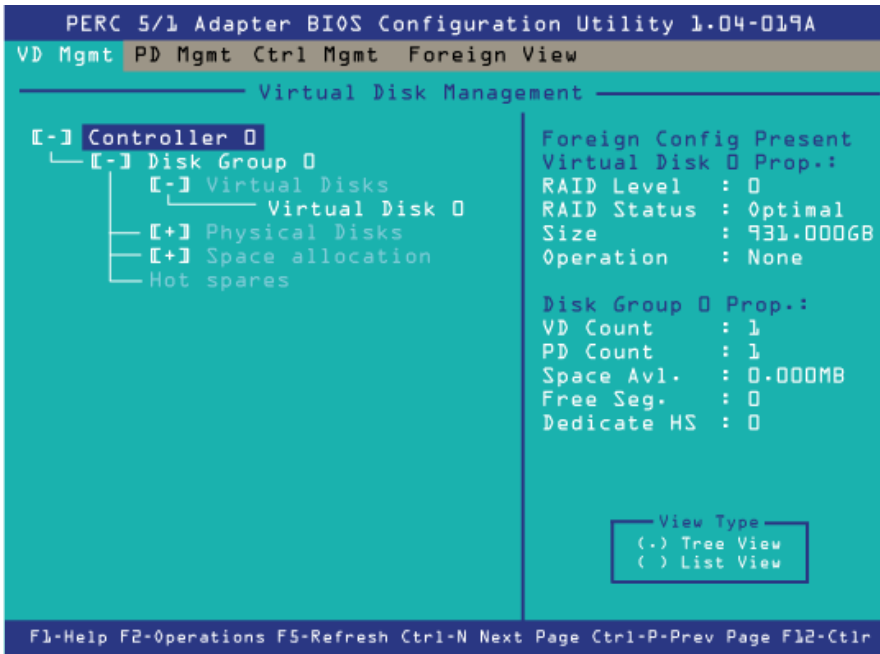


Step 3: Import Foreign Config.


Press the “F2” key, to open the pop-up menu. Use the arrow keys to select “Foreign Config” and press “Enter”. Press the “Enter” key again to accept the default “Import” selection.

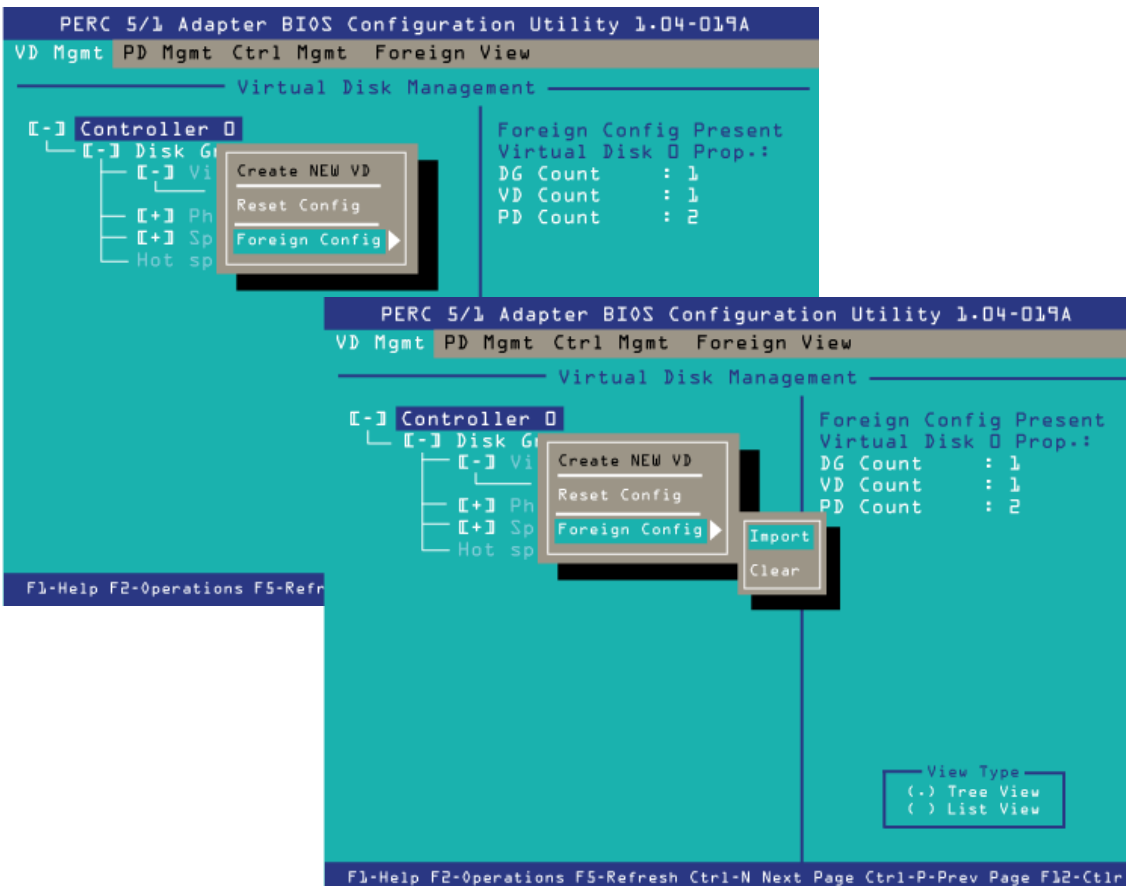


Step 4: Use the arrow keys to select the "Yes" box and press "Enter".

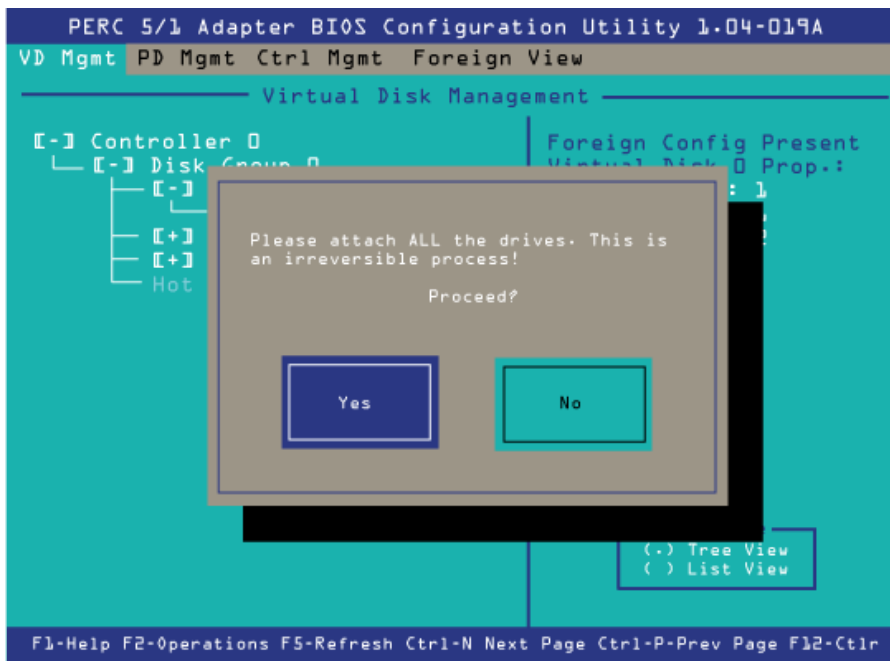

Step 5: Confirm that the hard drive has been added in the Controller menu under Physical Disks. The number at the end of the line will correspond to the bay number where you seated the hard drive.

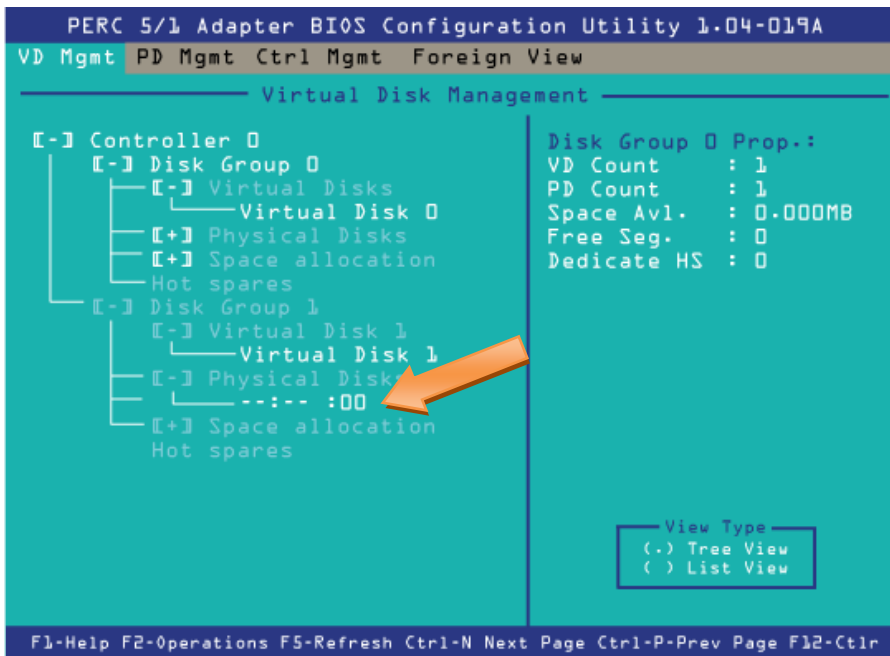


NOTE: If you are replacing the operating system drives in a **WAN-880x** or **WAN-1240** server, you will see both hard drives listed under Virtual Disk 0. If you are only replacing one drive in a RAID array pair (WAN-880x and WAN-1240 servers only), we recommend waiting until the RAID has been rebuilt before exiting the configuration utility.

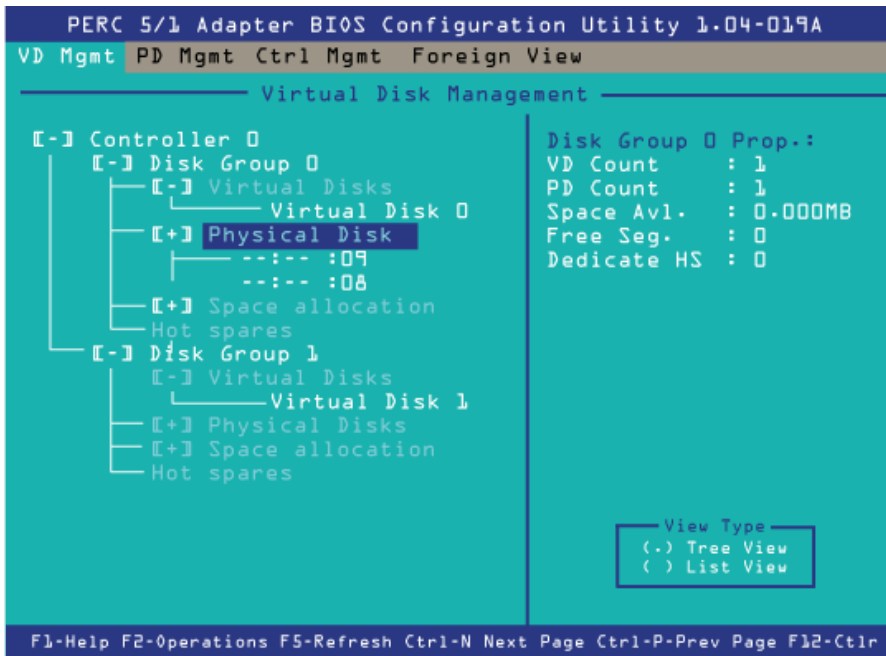

Step 6: Exit the configuration utility.

Press the “Esc” key to exit the configuration utility. Select the “OK” box using the arrow keys and press “Enter”.

You will be prompted to reboot by pressing the CTL-ALT-Delete key combination.

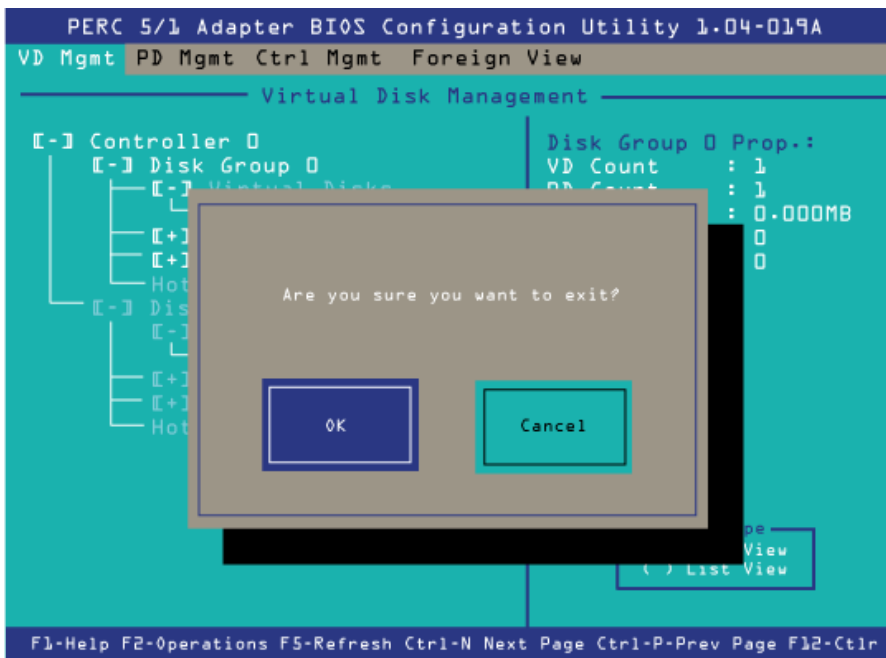

ACTIVATING A CONTENT PACKAGE OR ADD-ON PACKAGE

NOTE: We recommend that you allow internet access in order to activate and assign the content. You can confirm internet connectivity by using Ping tool accessed using the “Ping” tab in the Admin → Settings → Tools menu. If you are unable to connect your SAFARI Montage server to the internet, you will have to use the manual activation process. Details on this process can be found on the SAFARI Montage website at <http://www.safarimontage.com/support/support.aspx?type=manual>.

NOTE: If your server is running a version of the SAFARI Montage software that is less than version 3.3.1, you will need to contact a support representative at 800.782.7230 to request a content package activation software patch prior to activating your new content.

Step 1: Log in to your SAFARI Montage Interface as an administrator. Select “Settings” from the left navigation and then choose “Activate All Content & Add-ons”.

This method of activation requires internet connectivity. For servers not connected to the internet, manual activation is available as an option. Details on this process can be found on the SAFARI Montage website at <http://www.safarimontage.com/support/support.aspx?type=manual>.

The screenshot shows the SAFARI Montage Admin interface. The breadcrumb trail at the top reads "Admin • Settings • Content Packages". On the left-hand navigation menu, the "Content & Modules" section is expanded, and the "Activate All" option is highlighted with a red arrow. Below this, other options like "Add-On Modules", "Content Packages", and "Content Update Set" are visible. The main content area displays the "SAFARI MONTAGE" logo and a "License Agreements" section. It includes a "Digital Content License Agreement" with a "Printer Friendly" link. The agreement text is displayed in a scrollable box. Below the agreement, there is a checkbox for acknowledging the terms, followed by input fields for "Organization Name", "Name", "Title", and "Email". "Next »" and "Cancel" buttons are at the bottom right.

Step 2: Assign new content to schools.

If you are activating and assigning on a standalone server, assign packages to the school using the “Schools Management” page found in Admin → Settings → School. In a single school environment, the new packages may be auto-assigned to the default school.

The screenshot shows the 'School' management page. The left sidebar has 'Settings' expanded and 'School' selected. The main content area is titled 'My School' and contains the following elements:

- Buttons: [Add School](#), [View All Schools in All Groups](#), [New Group](#), [Edit Groups](#)
- Search: Alphabetical index (A-Z) and 'Other'.
- Results: 1 to 1 of 1.
- Navigation: [log in](#), [content packages](#) (circled in red), [users](#), [edit](#)
- Section: **My School**
- Text: Select the content packages below that you wish to assign to this school. Each assignment will use a new license unless unavailable.
- Buttons: [Save](#), [Cancel](#)
- Section: **Content Packages**
- Buttons: [Select All](#), [Unselect All](#), [Invert Selection](#), [Match Selection](#)
- Table of Content Packages:

Name	Licenses	Licenses Available	Expiration Date
<input checked="" type="checkbox"/> G1129B02MN Core K-8 Content Pkg (MP4-300k)	1	0	March 8, 2012
<input checked="" type="checkbox"/> G1129B02QN Core K-8 Content Pkg (MOV)	1	0	March 8, 2012
<input checked="" type="checkbox"/> G1204B01MN Algebra [®] scool Teaching System Content Pkg (MP4-300k)	1	0	March 8, 2012
<input checked="" type="checkbox"/> G1204B01QN Algebra [®] scool Teaching System Content Pkg (MOV)	1	0	March 8, 2012
<input checked="" type="checkbox"/> G1225B01FN Visual Dictionary Content Pkg	1	0	March 8, 2012
<input checked="" type="checkbox"/> G1243B02GN K-6 Supplemental Content Package (MP4-800k)	1	0	March 8, 2012
<input checked="" type="checkbox"/> G1243B02MN K-6 Supplemental Content Package (MP4-300k)	1	0	March 8, 2012
<input checked="" type="checkbox"/> G1263B01GN History Pictures Pkg	1	0	March 14, 2014
<input checked="" type="checkbox"/> G1294B01MN 9-12 Expansion Content Pkg (MP4-300k)	1	0	March 8, 2012
<input checked="" type="checkbox"/> G1294B01QN 9-12 Expansion Content Pkg (MOV)	1	0	March 8, 2012

If you are in a WAN Manager environment, assign packages to schools using the “Schools Management” page found in Admin → WAN Manager → Schools.

The screenshot shows the 'Schools Management' page. The left sidebar has 'WAN Manager' expanded and 'Schools' selected. The main content area is titled 'Schools Management' and contains the following elements:

- Buttons: [Add School](#), [View All Schools in All Groups](#), [New Group](#), [Edit Groups](#)
- Results: 1 to 4 of 4.
- Table of Schools:

Name	Assignments	Actions
Ardmore Middle School log in	7	edit • assignments • LDAP • users • delete
Hornet School log in	11	edit • assignments • LDAP • users • delete

Below the table is the 'Hornet School' management page:

- Section: **Hornet School**
- Text: Select the content packages below that you wish to assign to this school. Each assignment will use a new license unless unavailable.
- Buttons: [Save](#), [Cancel](#)
- Section: **Content Packages**
- Buttons: [Select All](#), [Unselect All](#), [Invert Selection](#), [Match Selection](#)
- Table of Content Packages:

Name	Licenses	Licenses Available	Expiration Date
<input checked="" type="checkbox"/> G1113B01WN Additional Schlessinger Media K-8 Content Pkg (WMV)	10	54 old	April 12, 2012
<input checked="" type="checkbox"/> G1117B01WN Additional Schlessinger Media K-8 Content Pkg Upgrade (WMV)	10	57 old	April 12, 2012
<input checked="" type="checkbox"/> G1125B01WN Core K-12 Content Pkg (WMV)	10	89 old	April 12, 2012
<input checked="" type="checkbox"/> G1129B01QN Core K-8 Content Pkg (MOV)	10	7 new • 2 old	April 12, 2012
<input checked="" type="checkbox"/> G1129B01WN Core K-8 Content Pkg (WMV)	10	6 new • 2 old	February 22, 2012
<input checked="" type="checkbox"/> G1137B01WN Middle School/Junior High School Supplemental Content Pkg (WMV)	10	7 new • 1 old	April 12, 2012
<input checked="" type="checkbox"/> G9873B01WN Almanac Newsreel Content Pkg (WMV)	10	8	April 12, 2012
<input checked="" type="checkbox"/> SAFARI Montage CreationStation	10	6 new • 2 old	
<input checked="" type="checkbox"/> SAFARI Montage Face-To-Face™	10	8	
<input checked="" type="checkbox"/> SAFARI Montage Local Document Camera & DVD Support	10	9	
<input checked="" type="checkbox"/> SAFARI Montage Pathways SM	10	9	
<input checked="" type="checkbox"/> SAFARI Montage Selective Video Streaming	10	2 new • 5 old	

ADDING A NEW CONTENT DRIVE OR CREATIONSTATION DRIVE TO SAFARI MONTAGE

PART 1: INSTALLING THE HARD DRIVE

Step 1: Install the hard drive as shown on page 5 “Installing a Hard Drive”.

NOTE: If you are installing more than one hard drive, install them all as shown on Page 5 “Installing a Hard Drive”.

NOTE: Content packages that are being replaced or upgraded should be unassigned from schools and deactivated **prior** to the removal of the hard drive that contains those packages.

Hornet School

Select the content packages below that you wish to assign to this school. Each assignment will use a new license unless unavailable.

Content Packages

Name	Licenses	Licenses Available	Expiration Date
<input checked="" type="checkbox"/> G1113B01WN Additional Schlessinger Media K-8 Content Pkg (WMV)	10	54 old	April 12, 2012
<input checked="" type="checkbox"/> G1117B01WN Additional Schlessinger Media K-8 Content Pkg Upgrade (WMV)	10	57 old	April 12, 2012
<input checked="" type="checkbox"/> G1125B01WN Core K-12 Content Pkg (WMV)	10	89 old	April 12, 2012
<input checked="" type="checkbox"/> G1129B01QN Core K-8 Content Pkg (MOV)	10	7 new • 2 old	April 12, 2012
<input checked="" type="checkbox"/> G1129B01WN Core K-8 Content Pkg (WMV)	10	6 new • 2 old	February 22, 2012
<input checked="" type="checkbox"/> G1137B01WN Middle School/Junior High School Supplemental Content Pkg (WMV)	10	7 new • 1 old	April 12, 2012
<input checked="" type="checkbox"/> G9873B01WN Almanac Newsreel Content Pkg (WMV)	10	8	April 12, 2012
<input checked="" type="checkbox"/> SAFARI Montage CreationStation	10	6 new • 2 old	
<input checked="" type="checkbox"/> SAFARI Montage Face-To-Face™	10	8	
<input checked="" type="checkbox"/> SAFARI Montage Local Document Camera & DVD Support	10	9	
<input checked="" type="checkbox"/> SAFARI Montage Pathways SM	10	9	
<input checked="" type="checkbox"/> SAFARI Montage Selective Video Streaming	10	2 new • 5 old	

Step 1: Access the Advanced Menu from the SAFARI Montage Console Menu.

Enter “3” at the prompt and press “Enter”.

```
SAFARI Montage
Host (FQDN).....: safarimontage.k12.st
Serial Number...: 005136
Version.....: 005.000.029 (110420150548)
IPv4 Address....: 172.20.50.209 (re0) [00:27:0e:08:bc:86]
-----
 1 : Network Settings...
 2 : UPS Monitor...
 3 : Advanced...

 5 : Update SAFARI Software...
 6 : Eject Removable Media
-----
Enter your selection and press Enter: 3
```

Step 2: Access the System Information Menu from the SAFARI Montage Advanced Console Menu.

Enter “1” at the prompt and press “Enter”.

```
SAFARI Montage..: Advanced
Host (FQDN).....: safarimontage.k12.st
Serial Number...: 005136
Version.....: 005.000.029 (110420150548)
IPv4 Address....: 172.20.50.209 (re0) [00:27:0e:08:bc:86]
-----
 1 : System Information...
 2 : Database Maintenance...
 3 : Hard Drive Maintenance...
 4 : Time Zone
 5 : Date/Time
 6 : Reboot
 7 : Shutdown

 9 : Tech Support Remote Access...

 0 : Return
-----
Enter your selection and press Enter: 1
```

Step 3: Access the Available Packages list from the SAFARI Montage System Information Console Menu.

Enter "1" at the prompt and press "Enter".

```
SAFARI Montage..: System Information
Host (FQDN).....: safarimontage.k12.st
Serial Number...: 005136
Version.....: 005.000.029 (110420150548)
IPv4 Address....: 172.20.50.209 (re0) [00:27:0e:08:bc:86]
-----
 1 : Available Packages (q to stop)
 2 : Physical Disks (q to stop)
 3 : Running Processes (q to stop)
 4 : System Status (:q to stop)
 5 : NIC Bandwidth (:q to stop)
 6 : TCP Statistics (:q to stop)
 7 : Disk Statistics (:q to stop)

 0 : Return
-----
Enter your selection and press Enter: [ ]
```

Step 4: Confirm that the new content package or CreationStation is listed.

```
ad4.bde : CVQ020
-----
G1113B01MN Additional Schlessinger Media K-8 Content Pkg (MP4_300k-186)
G1117B01MN Additional Schlessinger Media K-8 Content Pkg Upgrade (MP4_300k-188)
G1121B01MN Additional Schlessinger Media 9-12 Content Pkg (MP4_300k-187)
G1125B01MN Core K-12 Content Pkg (MP4_300k-192)
G1129B01MN Core K-8 Content Pkg (MP4_300k-189)
G1133B01MN Core 9-12 Content Pkg (MP4_300k-191)
G1137B01MN Middle School/Junior High School Supplemental Content Pkg (MP4_300k-193)
G1145B01MN Core K-8 w/o Schlessinger Media Content Pkg (MP4_300k-194)
G1149B01MN Core 9-12 w/o Schlessinger Media Content Pkg (MP4_300k-195)
G1153B01MN Additional Schlessinger Media K-8 Content Pkg - Rev. A (MP4_300k-190)
G1170B01MN Schlessinger Media K-8 Content Pkg (MP4_300k-196)
G1174B01MN Schlessinger Media 9-12 Content Pkg (MP4_300k-197)
G1204B01MN Algebra'scool Teaching System Content Pkg (MP4_300k-199)
G1208B01MN Math'scool Teaching System Content Pkg (MP4_300k-200)
G1224B01MN National Underground Railroad Freedom Center Pkg (MP4_300k-201)
G9791B01MN Video Encyclopedia of the 20th Century Content Pkg (MP4_300k-184)
G9873B01MN Almanac Newsreel Content Pkg (MP4_300k-185)
G9981B01MN Reading Rainbow Content Pkg (MP4_300k-183)
G1226B01DN Paintings by the Masters Image Pkg (IMG-208)
G1243B01MN K-6 Supplemental Content Pkg (MP4_300k-250)
G1294B01MN 9-12 Expansion Content Pkg (2009) (MP4_300k-262)
G1298B01MN 9-12 Super Core Content Pkg (MP4_300k-268)
G1304B01MN K8UG (MP4_300k-265)
G1129B02MN Core K-8 Content Pkg (2010) (MP4_300k-277)
G1306B01MN Eyes on the Prize Content Pkg (MP4_300k-274)
G1307B01MN UGS8 (MP4_300k-271)
G1125B02MN Core K-12 Content Pkg (2010) (MP4_300k-285)
G1311B01MN K-12 Super Core Content Pkg (MP4_300k-288)
G1310B01MN SUGS7 (MP4_300k-296)
G1308B01MN K8UG6 (MP4_300k-293)
: [ ]
```

NOTE: If this is a WAN Manager Expansion Controller, you can move on to Part 3: Upgrading the SAFARI Montage Software, if necessary. While the Expansion Controller is updating, you can install the new hard drives in the Expansion Servers (see Page 5). Leave the Expansion Servers powered down and offline until the Expansion Controller has completed the software update.

PART 3: UPGRADING THE SAFARI MONTAGE SOFTWARE

If you received a software upgrade to your SAFARI Montage system, please follow the instructions for running the software upgrade once your hard drive has been installed.

Instructions for installing the software upgrade can be found at <http://www.safarimontage.com/support>.

NOTE: If this is a WAN Manager with Expansion Server environment, wait until the Expansion Controller reports that all the servers have been updated to the new version. When the software is updated on the Expansion Controller, it is pushed to the Expansion Servers as they become available on the network.

The screenshot displays the Safari Montage Admin interface. At the top, the header shows 'SAFARI MONTAGE' and 'Hornet School'. Below the header, there is a navigation menu with options: Dashboard, Search, Subjects, Standards, Playlists, Modules, Preferences, Admin, and Help. The main content area is titled 'SAFARI Montage Help' and contains a sidebar with a tree view of help topics (Welcome, User Guide, Administrator Guide, Troubleshooting, etc.) and a main pane showing system information. The system information pane displays the following details:

- Serial Number: 002110
- Version: 4.5.1
- Build Number: 110401141553

Below this, there is a 'Reset Usage' link and a section for 'Auto-Disable Expansion Servers' with a checked checkbox. A 'Force IP address when communicating' checkbox is also present. A table shows the status of expansion servers:

Active	Streamer	Version	IP	Host	% Synchronized	Status	Usage
✓	✓	5.0.30	172.20.50.202	claymore.wyn.lvc.com	---	---	50.00%
✓	✓	5.0.30	172.20.50.183	gladius.wyn.lvc.com	~100%	1 min 12 secs	50.00% clear


The footer of the interface includes the text 'SAFARI Montage © 2005-2011 LibranVidex Company. All Rights Reserved.'

NOTE: If this is a WAN Manager Parent Server with WAN Manager Child Servers in the environment, the updates can be manually pushed to the children using the “Remote Update” features found in Admin → WAN Manager → Child Servers. You can choose “Remote update all servers” or check the “Remote Update” checkbox for each individual WAN Manager Child Server for more granular control over how the update is distributed.

NOTE: If this is a WAN Manager with Expansion Server environment, you must synchronize the new packages on the Expansion Servers with the Expansion Controller as follows:

Step 1: Access SAFARI Montage in a web browser and log in.

Step 2: Click on the “Map Volumes” link on the “System Volumes” page in the Admin → Tools menu.

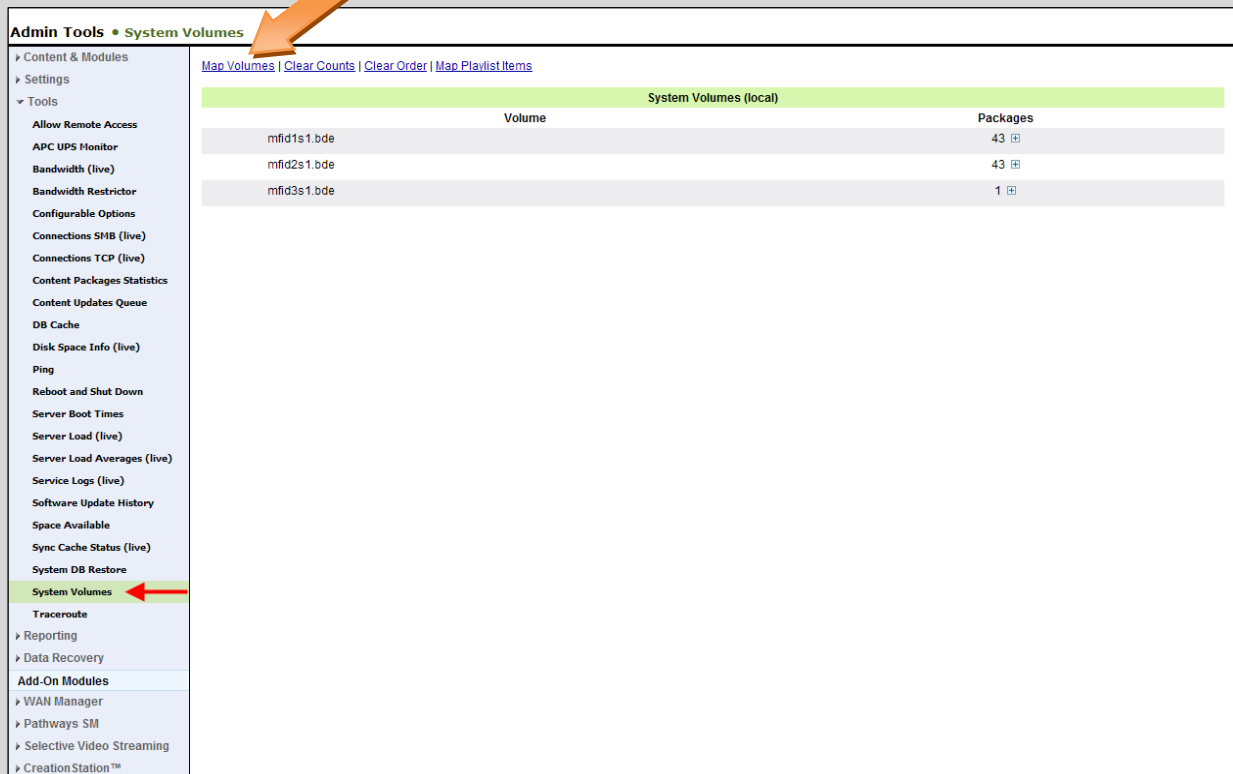

Admin Tools • System Volumes

[Map Volumes](#) | [Clear Counts](#) | [Clear Order](#) | [Map PlaylistItems](#)

Volume	Packages
mfid1s1.bde	43
mfid2s1.bde	43
mfid3s1.bde	1

This will trigger a process that loads data for the new packages into the system database.

The process is complete when you see the word “Complete” at the bottom of the “Volumes Map Log” that is displayed on the screen.

```
UPDATE videos SET volume='DL208:1' WHERE location=
Pre-Loaded Content
INSERT INTO volume (volume, itemorder, id, storag
UPDATE vi SET volume='DL207:1' WHERE location=
Complete
```

Step 3: Expand the Content Packages list under each Volume to confirm that the new packages are available for activation.

Admin Tools • System Volumes

[Map Volumes](#) | [Clear Counts](#) | [Clear Order](#) | [Map Playlist Items](#)

System Volumes (local)				
Volume	Packages			
mfd1s1.bde	43			
mfd2s1.bde	43			
Package Name	ID	storage	count	order
G9981B01QN Reading Rainbow Content Pkg (MOV-84)	DL084.1		0	0
G9791B01QN Video Encyclopedia of the 20th Century Content Pkg (MOV-85)	DL085.1		0	0
G9873B01QN Almanac Newsreel Content Pkg (MOV-88)	DL088.1		0	0
G1183B01DN World Factbook Content Pkg (IMG-92)	DL092.1		0	0
G1113B01QN Additional Schlessinger K-8 Content Pkg (MOV-94)	DL094.1		0	0
G1121B01QN Additional Schlessinger Media 9-12 Content Pkg (MOV-96)	DL096.1		0	0
G1117B01QN Additional Schlessinger Media K-8 Content Pkg Upgrade (MOV-98)	DL098.1		0	0
G1129B01QN Core K-8 Content Pkg (MOV-152)	DL152.1		60	0
G1153B01QN Additional Schlessinger Media K-8 Content Pkg - Rev. A (MOV-154)	DL154.1		0	0
G1133B01QN Core 9-12 Content Pkg (MOV-156)	DL156.1		0	0
G1125B01QN Core K-12 Content Pkg (MOV-158)	DL158.1		0	0
G1137B01QN Middle School/Junior High School Supplemental Content Pkg (MOV-160)	DL160.1		0	0
G1145B01QN Core K-8 w/o Schlessinger Media Content Pkg (MOV-162)	DL162.1		0	0
G1149B01QN Core 9-12 w/o Schlessinger Media Content Pkg (MOV-164)	DL164.1		0	0
G1170B01QN Schlessinger Media K-8 Content Pkg (MOV-166)	DL166.1		0	0
G1174B01QN Schlessinger Media 9-12 Content Pkg (MOV-168)	DL168.1		0	0
G1192B01DN Schlessinger Media Image Library Content Pkg (IMG-171)	DL171.1		0	0
G1204B01QN Algebra'scool Teaching System Content Pkg (MOV-173)	DL173.1		0	0
G1208B01QN Math'scool Teaching System Content Pkg (MOV-175)	DL175.1		0	0
G1224B01QN National Underground Railroad Freedom Center Pkg (MOV-182)	DL182.1		0	0
G1214B01DN Images from NASA Pkg (IMG-207)	DL207.1		0	0
G1226B01DN Paintings by the Masters Image Pkg (IMG-208)	DL208.1		0	0
G1225B01FN The Visual Dictionary Interactive Image Pkg (VIS-215)	DL215.1		0	0
G1243B01QN K-6 Supplemental Content Pkg (MOV-235)	DL235.1		0	0
G1263B01GN History Pictures Pkg (GEN-236)	DL236.1		0	0
G1294B01QN 9-12 Expansion Content Pkg (2009) (MOV-261)	DL261.1		0	0
G1304B01QN K8UG (MOV-264)	DL264.1		0	0
G1298B01QN 9-12 Super Core Content Pkg (MOV-267)	DL267.1		0	0
G1307B01QN UGS8 (MOV-270)	DL270.1		0	0
G1306B01QN Eyes on the Prize Content Pkg (MOV-273)	DL273.1		0	0
G1129B02QN Core K-8 Content Pkg (2010) (MOV-276)	DL276.1		0	0
G1302B01GN Career Clips Content Pkg (MPG-278)	DL278.1		0	0
G1301B01QN UGS7 (MOV-280)	DL280.1		0	0

Follow the instructions found on page 13 “Activating a Content Package or Add-On Package”.

NOTE: If this is a WAN Manager with Expansion Server environment, check the “Expansion Servers” page found in Admin → Expansion Server → Expansion Servers to note when the servers have reached 100% Synchronization.

The screenshot shows the Safari Montage Admin interface for Claymore School. The top navigation bar includes links for DASHBOARD, SEARCH, SUBJECTS, STANDARDS, PLAYLISTS, MODULES, PREFERENCES, ADMIN, and HELP. The left sidebar lists various modules, with 'Expansion Servers' selected. The main content area shows the 'Expansion Servers' settings, including a 'Reset Usage' link and checkboxes for 'Auto-Disable Expansion Servers' (checked) and 'Force IP address when communicating' (unchecked). Below this is a table with the following data:

Results 1 to 1 of 1									
Active	Streamer	Version	Serial Number	IP	Host	% Synchronized	Status	Usage	
<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	5.0.30	002457	172.20.50.202	claymore.wyn.lvc.com	---	---	50.00%	
<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	5.0.30	001590	172.20.50.183	gladius.wyn.lvc.com	~100%	1 min 12 secs	50.00%	clear

At the bottom of the page, there is a copyright notice: © 2005-2011 Library Video Company. All Rights Reserved.

RESTORING BACKUP TO A DIFFERENT SAFARI MONTAGE SERVER (DRIVE SWAP)

The following sections explain how to transition to a different or new SAFARI Montage server.

PART 1: UPGRADING THE SAFARI MONTAGE SOFTWARE

If you received a software upgrade to your SAFARI Montage system, please follow the instructions for installing the software upgrade prior to performing the backup. Instructions for installing the software upgrade can be found at <http://www.safarimontage.com/support>.

PART 2: BACKING UP DATA AND MEDIA

Before you integrate a new server into your network, you must first perform a backup of all the files that are unique to your existing system, including playlists and user information. These can be found on page 3 “Backing Up Data and Media”.

PART 3: INSTALLING THE SAFARI MONTAGE SERVER

Install the new server by following the instructions found in the Installation Guide that is included with your new server.

PART 4: ACTIVATING CONTENT PACKAGES AND ADD-ONS

If your content packages and add-ons have not been pre-activated, you will need to activate your content packages and add-ons. Follow the instructions found on page 13 “Activating a Content Package or Add-On Package”.

PART 5: RESTORING DATA AND MEDIA FROM BACKUP

Instructions for SAFARI Montage Data Recovery can be found in the Help section under “Backup and Data Recovery Guide” in the “Administrator Guide”.

Once the data has been restored, there may be some custom settings that need to be reset and some custom files that need to be re-uploaded. These include:

- LDAP Configuration
- Time Server settings
- CreationStation Logo
- Personalized Login Screen images

If you find that you need to access data off the previous SAFARI Montage server, you can bring the new server down and temporarily bring the previous server back on the network so you can save that data. Once you have the data you need, power down and disconnect the previous server from the network and reconnect the new server.

If you are upgrading your SAFARI Montage system, you may have received upgraded content packages. After the restore, you may notice blank lines on the “Schools Management” page. You should un-assign these packages from your school and assign the new packages if necessary.

Admin Tools • WAN Manager™ • Schools Management

Settings

- Activate All Content & Add-ons
- Content Packages
- LDAP
- Login Screen
- Network
- School
- SSL
- System
- Time
- Users

Tools

- Reporting
- Data Recovery

Add-Ons

- Configure
- CreationStation™

Results 1 to 1 of 1

Name	Serial #	Log In Users	Delete
SAFARI Montage Server	002467	Log In Users	
Local content package assignments: 4			
G1183B01DN World Factbook Content Pkg (IMG)			
SAFARI Montage CreationStation			
G1129B01QN Core K-8 Content Pkg (MOV)	Expires: December 12, 2011		

SAFARI Montage
© 2005-2008 Library Video Company. All Rights Reserved.

PART 6: MAPPING PLAYLIST ITEMS

Existing playlists will need to be mapped to the new content packages. Click on the “Map Playlist Items” link in the Tools menu found in Admin → Tools → System Volumes.

[Map Volumes](#) | [Clear Counts](#) | [Clear Order](#) | [Map Playlist Items](#)

System Volumes (local)

Volume	Packages
mfd1s1.bde	43
mfd2s1.bde	43
mfd3s1.bde	1

PART 7: TEST THE SYSTEM

Once all the steps have been completed, test your new server to confirm that users can play media and all restored data is in place. If your new server is not functioning properly, please review this documentation and also see the “Troubleshooting” section on page 26.

UPGRADING OR REPLACING OPERATING SYSTEM HARD DRIVE

The following sections explain how to upgrade or replace the operating system for your SAFARI Montage server.

PART 1: UPGRADING THE SAFARI MONTAGE SOFTWARE

If you received a software upgrade to your SAFARI Montage system, please follow the instructions for installing the software upgrade prior to performing the backup. Instructions for installing the software upgrade can be found at <http://www.safarimontage.com/support>.

PART 2: BACKING UP DATA AND MEDIA

Before you integrate a new server into your network, you must first perform a backup of all the files that are unique to your existing system, including playlists and user information. These can be found on page 3 “Backing Up Data and Media”.

PART 3: INSTALLING OPERATING SYSTEM HARD DRIVE

Install the operating system hard drive as shown on page 5 “Installing a Hard Drive”. If this is a WAN-880x or WAN-1240 server, you may need to replace two hard drives.

PART 4: ACTIVATING CONTENT PACKAGES AND ADD-ONS

If your content packages and add-ons have not been pre-activated, you will need to activate your content packages and add-ons. Follow the instructions found on page 13 “Activating a Content Package or Add-On Package”.

PART 5: RESTORING DATA AND MEDIA FROM BACKUP

Instructions for SAFARI Montage Data Recovery can be found in the Help section under “Backup and Data Recovery Guide” in the “Administrator Guide”.

Once the data has been restored, there may be some custom settings that need to be reset and some custom files that need to be re-uploaded. These include:

- LDAP Configuration
- Time Server settings
- CreationStation Logo
- Personalized Login Screen images

If you are also adding or changing the content hard drives in your SAFARI Montage system, you may have received upgraded content packages. After the restore, you may notice blank lines on the “Schools Management” page. You should un-assign these packages from your school and assign the new packages if necessary.

Admin Tools • WAN Manager™ • Schools Management

Settings

- Activate All Content & Add-ons
- Content Packages
- LDAP
- Login Screen
- Network
- School
- SSL
- System
- Time
- Users

Tools

- Reporting
- Data Recovery
- Add-Ons
- Configure
- CreationStation™

Results 1 to 1 of 1

Name	Serial #	Log In Users	Delete
SAFARI Montage Server	002467	Log In Users	
Local content package assignments: 4			
G1183B01DN World Factbook Content Pkg (IMG)			
SAFARI Montage CreationStation			
G1129B01QN Core K-8 Content Pkg (MOV)	Expires: December 12, 2011		

SAFARI Montage
© 2005-2008 Library Video Company. All Rights Reserved.

PART 6: MAPPING PLAYLIST ITEMS

Existing playlists will need to be mapped to the new content packages. Click on the “Map Playlist Items” link in the Tools menu found in Admin → Tools → System Volumes.

[Map Volumes](#) | [Clear Counts](#) | [Clear Order](#) | [Map Playlist Items](#)

System Volumes (local)	
Volume	Packages
mfid1s1.bde	43
mfid2s1.bde	43
mfid3s1.bde	1

PART 7: TEST THE SYSTEM

Once all the steps have been completed, test your new server to confirm that users can play media and all restored data is in place. If your new server is not functioning properly, please review this documentation and also see the “Troubleshooting” section on page 26.

TROUBLESHOOTING

SERVER WILL NOT BOOT

If you have replaced hard drives in the system and the server will not boot, the following steps can help you troubleshoot the situation:

1. Power down using the power button on the server.
2. Confirm that the hard drives are seated securely in the bay.
3. Power up the server.
4. If there is an error in the hard drive configuration, you may see the message “PXE-MOF : Exiting Broadcom PXE ROM” followed by a blinking cursor. If the reboot process hangs here, you will need to reconfigure the Virtual Disks in the Raid Configuration Utility as shown on page 5 “Installing a Hard Drive”, so that the boot drives are configured under Virtual Disk 0.

GENERAL PROBLEMS

If you are having difficulties with the installation, there are some things you can do before calling for technical support. These include:

- Power down and confirm that the hard drive is seated properly.
- Review the documentation and confirm that you have completed all the necessary steps.

If you have difficulties with installation and you need further information, please call a support representative at 800.782.7230. When calling, please have both your server's serial number and service tag number available. Your serial number can be found in the Help → About section of the SAFARI Montage application and on the outside of your server, and your service tag number can be found on the back of the server.